


PRECISION TELEHANDLER - PT40

TECHNICAL & DIMENSION DATA

MODEL	PT40
Engine	GM 3.0 L 91 hp at 3000 rpm
Transmission	Hydrostatic, 0-6mph infinitely variable
Hyd. System	Load sensing, pressure compensated
Hyd. Filtration	3 micron synthetic element
Electrical	Sealed IP66 Minimum

	PT40
Tires	28x10x22, front duals, rear singles
Gradeability	24% with 40,000 lb. load
Tractive Effort	20,000 lbs.
Weights	40,700 lbs. complete
- Jib and Rack	2,800 lbs.
- Removable Counterweight	12,000 lbs.
- Both Forks	1,600 lbs.

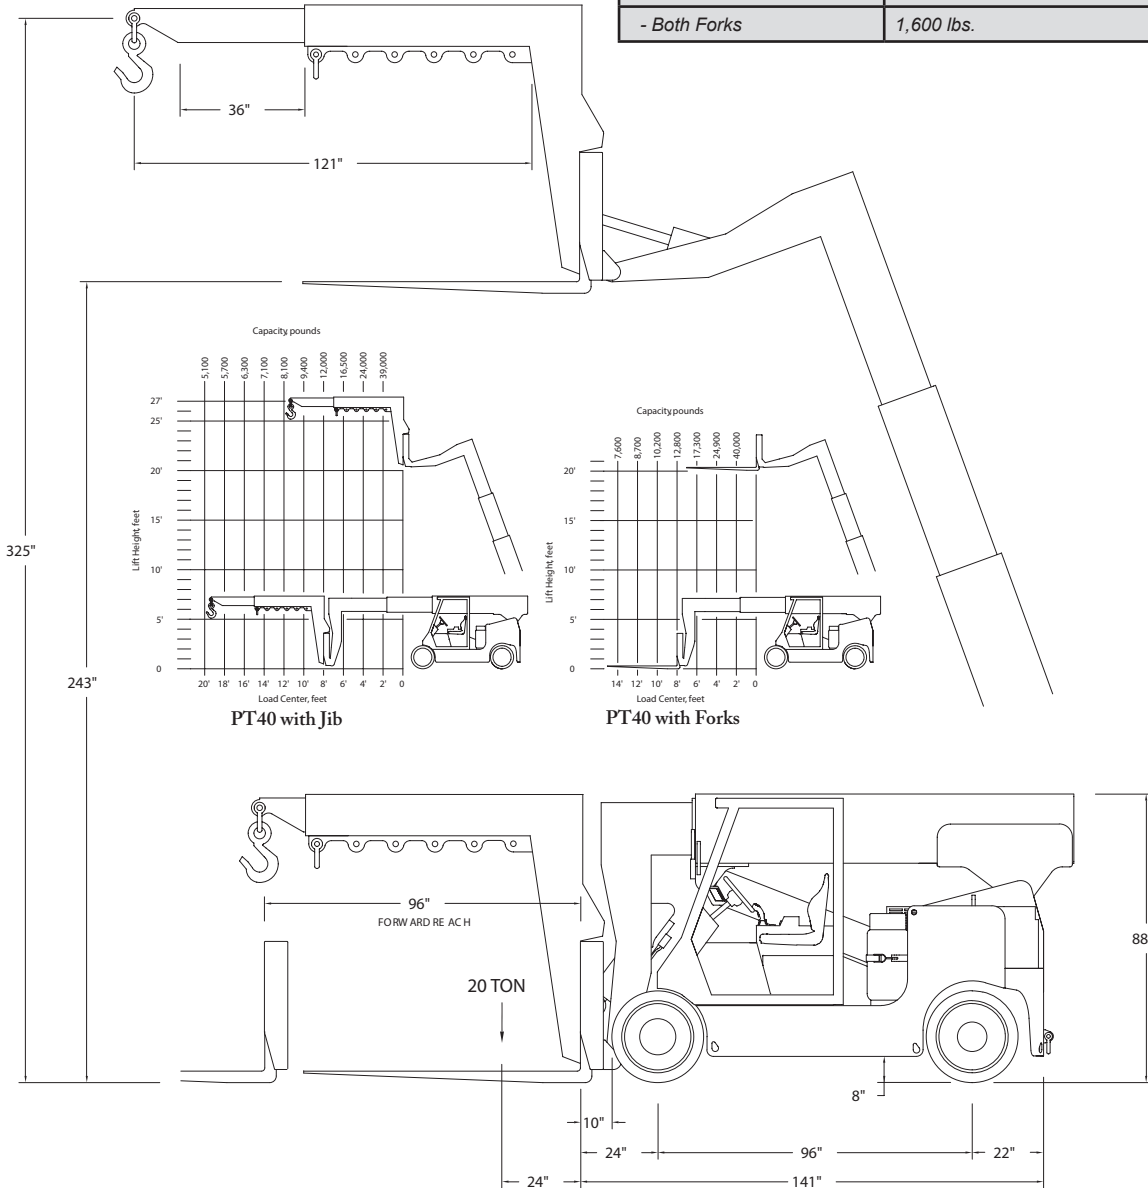

The specifications contained in this spec sheet are subject to change at any time without notice. Actual dimensions and performance data given herein may vary due to manufacturing tolerances.



www.landoll.com/mhp

1900 North Street | Marysville, KS 66508 |

