



## Versa Lift 40/60 XT

Features

| Versa Lift 40/60 Features                                                                                                                                                                   |                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| <b>Engine:</b>                                                                                                                                                                              | GM 3.0L                                                  |
| <b>Transmission:</b>                                                                                                                                                                        | Rexroth Hydrostatic                                      |
| <b>Drive Axle:</b>                                                                                                                                                                          | Rockwell Planetary Drive                                 |
| <b>Tires:</b>                                                                                                                                                                               | Front 28X10X22 Poly<br>Rear 28X10X22 Poly                |
| <b>Grade:</b>                                                                                                                                                                               | Empty 47%<br>Loaded 20%                                  |
| <b>Tilt:</b>                                                                                                                                                                                | Forward 12°<br>Back 7°                                   |
| <b>Weight:</b>                                                                                                                                                                              | Gross: 58,000 lbs<br>Boom: 5,500 lbs<br>Forks: 3,000 lbs |
| <b>Boom Reach:</b>                                                                                                                                                                          | 30'6" (to center of pin)                                 |
| <b>Load Capacity:</b>                                                                                                                                                                       | 40,000 lbs @ 36" retracted<br>60,000 lbs @ 36" extended  |
| <b>Width:</b>                                                                                                                                                                               | 72"                                                      |
| <b>Wheelbase:</b>                                                                                                                                                                           | 98" retracted<br>146" extended                           |
| <b>Additional Features:</b>                                                                                                                                                                 |                                                          |
| <ul style="list-style-type: none"><li>- Boom removes in minutes with special Boom stand</li><li>- Horizontal Boom retracts while using forks</li><li>- 2-stage direct roller mast</li></ul> |                                                          |



## Versa Lift 40/60 XT

Lifting Capacity

**Slab Weight (lbs)**

**3750**

**Number of Slabs**

**4**

**Standard Wheel Base (in)**

**98**

| Lifting Capacity w/ Forks Only (lbs) |    |                              |       |       |       |       |
|--------------------------------------|----|------------------------------|-------|-------|-------|-------|
|                                      |    | Counterweight Extension (in) |       |       |       |       |
|                                      |    | 0                            | 12    | 24    | 36    | 48    |
| Load Center From Fork Face (in)      | 36 | 41600                        | 46300 | 51000 | 55600 | 60300 |
|                                      | 48 | 34800                        | 38700 | 42600 | 46500 | 50400 |
|                                      | 60 | 30000                        | 33300 | 36600 | 40000 | 43300 |
|                                      | 72 | 26300                        | 29200 | 32100 | 35100 | 38000 |
|                                      | 84 | 23400                        | 26000 | 28600 | 31200 | 33800 |

www.a1lift.net


| Lifting Capacity w/ Boom Only (lbs) |     |                              |       |       |       |       |
|-------------------------------------|-----|------------------------------|-------|-------|-------|-------|
|                                     |     | Counterweight Extension (in) |       |       |       |       |
|                                     |     | 0                            | 12    | 24    | 36    | 48    |
| Load Center From Boom Face (in)     | 24  | 39700                        | 44200 | 48800 | 53400 | 58000 |
|                                     | 36  | 33300                        | 37100 | 41000 | 44800 | 48600 |
|                                     | 48  | 28700                        | 32000 | 35300 | 38600 | 41900 |
|                                     | 60  | 25200                        | 28100 | 31000 | 33900 | 36800 |
|                                     | 72  | 22400                        | 25000 | 27600 | 30200 | 32800 |
|                                     | 78  | 21300                        | 23700 | 26200 | 28600 | 31100 |
|                                     | 84  | 20200                        | 22600 | 24900 | 27200 | 29600 |
|                                     | 90  | 19300                        | 21500 | 23700 | 26000 | 28200 |
|                                     | 96  | 18400                        | 20600 | 22700 | 24800 | 26900 |
|                                     | 102 | 17600                        | 19700 | 21700 | 23800 | 25800 |
|                                     | 108 | 16900                        | 18900 | 20800 | 22800 | 24700 |
|                                     | 114 | 16300                        | 18100 | 20000 | 21900 | 23800 |

www.a1lift.net

| Lifting Capacity w/ Forks & Boom (lbs) |    |                              |       |       |       |       |
|----------------------------------------|----|------------------------------|-------|-------|-------|-------|
|                                        |    | Counterweight Extension (in) |       |       |       |       |
|                                        |    | 0                            | 12    | 24    | 36    | 48    |
| Load Center From Boom Face (in)        | 24 | 38300                        | 42900 | 47500 | 52100 | 56600 |
|                                        | 36 | 32200                        | 36000 | 39800 | 43700 | 47500 |
|                                        | 48 | 27700                        | 31000 | 34300 | 37600 | 40900 |
|                                        | 60 | 24300                        | 27200 | 30100 | 33000 | 35900 |
|                                        | 72 | 21700                        | 24300 | 26900 | 29400 | 32000 |

www.a1lift.net

**\*\*\*All Load Capacities are rated with the mast vertical.**

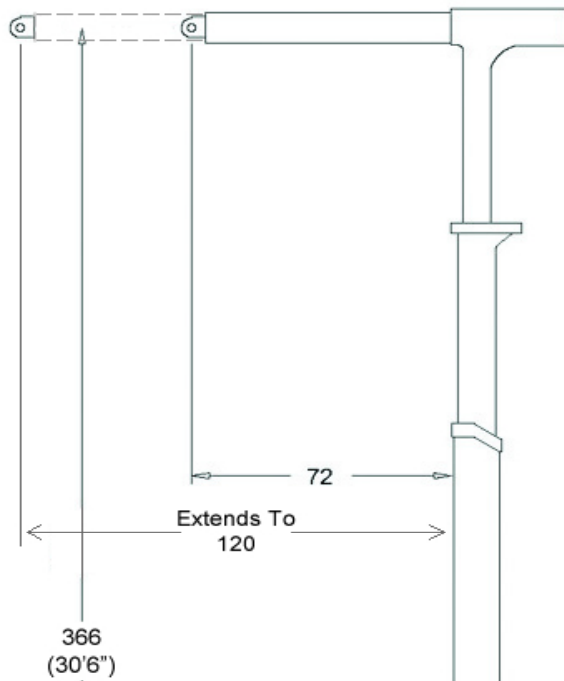

|                       |                                                          |
|-----------------------|----------------------------------------------------------|
| <b>Engine:</b>        | GM 3.0L                                                  |
| <b>Transmission:</b>  | Rexroth Hydrostatic                                      |
| <b>Drive Axle:</b>    | Rockwell Planetary Drive                                 |
| <b>Tires:</b>         | Front 28X10X22 Poly<br>Rear 28X10X22 Poly                |
| <b>Grade:</b>         | Empty 47%<br>Loaded 20%                                  |
| <b>Tilt:</b>          | Forward 12°<br>Back 7°                                   |
| <b>Weight:</b>        | Gross: 58,000 lbs<br>Boom: 5,500 lbs<br>Forks: 3,000 lbs |
| <b>Boom Reach:</b>    | 30'6" (to center of pin)                                 |
| <b>Load Capacity:</b> | 40,000 lbs @ 36" retracted<br>60,000 lbs @ 36" extended  |
| <b>Width:</b>         | 72"                                                      |
| <b>Wheelbase:</b>     | 98" retracted<br>146" extended                           |

